

Superior SURFACE FINISH

Chemical Purity

ppm	Li	Na	K	Mg	Ca	Fe	Cu	Ti	Al
OM® 100	0.1	0.1	0.2	<0.03	0.4	0.1	<0.01	1.1	15
Synthetic OM®	<0.005	0.01	0.02	<0.01	0.1	0.02	<0.005	<0.01	<0.1

Surface Finish


OM® 100



Competitor material



Complete Thermal Management

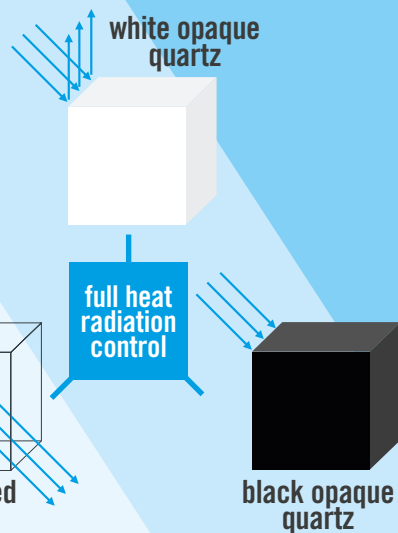

CONTACT

Germany
Heraeus Quarzglas GmbH & Co. KG
Heraeus Covantics
Reinhard-Heraeus-Ring 29 63801
Kleinostheim, Germany
cfq@heraeus.com
www.herae.us/cfq

Heraeus

RETAIN THE HEAT
OF YOUR WORLD




The data given here is correct for July 2019 and is subject to change. | The Heraeus logo, Heraeus, OM® and the OM logo are trademarks or registered trademarks of Heraeus Holding GmbH or its affiliates. All rights reserved. HCA-SemIOG_14.0/E/07.2019

Heraeus Opaque Quartz OM®
the unique thermal management solution

Unique MATERIAL PROPERTIES




Heat blocking properties



Near net shape manufacturing



Superior surface finish



Clear fused quartz compatibility



Ultra high purity

The uniquely high hemispheric reflection of OM®100 enables this to be the ideal heat blocking material. In such applications as adiabatic plates OM®100 will improve your total cost of ownership. By reducing heat loss you can benefit from improved process control, reduced energy needs and improved lifetime of your heating components. The heat blocking properties of OM®100 out-perform any comparable material available on the market today.

The patented manufacturing method of OM®100 allows it to be manufactured close to the dimensions of the finished component. This reduces excess material and lowers machining steps. This improved efficiency in manufacturing contributes to a lower cost for the finished part.

White opaque quartz is often used as flanges or chamber seals to thermally protect the O-ring material. To ensure an optimal seal at the O-ring, the smoothest surface possible is critical. The unique physical properties of OM®100 allow for a greatly improved surface finish after manufacturing and multiple refurbishment cycles, giving you the best seal possible every time and an extended lifetime of use for when compared to parts made from other opaque quartz materials.

One of the key features of our OM®100 material is its comparable processing properties to clear fused quartz (e.g. HSQ®300) for both hot and cold processes. OM®100 is 100% compatible to the hot working and cold machining of clear fused quartz and as required can be welded, fire polished or thermally reformed. In addition if using OM®100 for demanding applications it can be CNC ground and optically polished to the highest precision.


OM®100 offers you a total level of impurities of <50ppm and is both suitable and qualified for even the most challenging semiconductor processes of today. A synthetic version of Heraeus OM® is now developed to support the next generation of semiconductor processes where impurities are one of the biggest challenges. Utilizing a synthetic opaque material from Heraeus will offer you a total level of impurities of <1ppm to support your advanced processes, with all the other advantages of OM®100.

Superior HEAT BLOCKING

Near Net Shape Manufacturing



Reflectivity

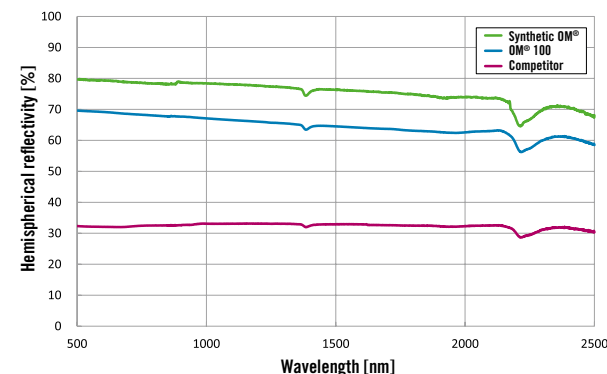

OM® – Physical Properties

Density g/cm ³	2.15 – 2.18
Porosity	< 2,3%
Pore size	< 20 µm
CTE (0...900°C)	0.47 × 10 ⁻⁶
Max. working temp. – continuous	1100°C
Max. working temp. – short term	1300°C
Specific heat [J/(gK)], RT	0.70
Heat conductivity [W/(mK)], RT	1.24
Dielectric constant (ε), RT, 13.56 MHz	3.7
Dielectric loss angle (tan δ), RT, 13.56 MHz	1 x 10 ⁻⁴